

February 25, 2009

Tampa Groves Mining, LLC
P.O. Box 1800
Wimauma, Florida 33598

Attn: Mr. John Jackson

Re: **Results of Soil Testing**

Proposed Suitability of Fill Materials, Tampa Groves Mine – North Pit
16500 Balm Wimauma Road, Hillsborough County, Florida
PSI Project No. 787-85141

As requested, PSI collected soil samples from the above referenced site. Grain size and organic content testing was performed in accordance with ASTM D 1140 and D 2974 methods, respectively. Results are presented below:

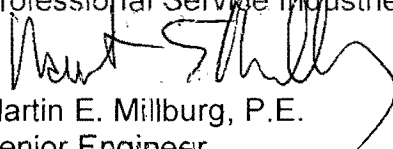
Sieve Opening Size	Percent Passing, Sample A	Percent Passing, Sample B
No. 8	100	100
No. 16	99	99
No. 30	96	93
No. 50	73	65
No. 100	33	28
No. 200	4	4
Organic Content, %	0.6	0.9

Based upon the test results shown above, the soils were classified as SP in accordance with ASTM D 2487 procedures. Organic content was less than 1%. SP soils can have a maximum of 5% fines (passing #200 sieve) content. SP-SM and SP-SC soils can have up to 12% fines, and SC soils can have up to 50% fines content. Accordingly, the SP soils meet or exceed the standards for SP-SM, SP-SC and SC soils.

We appreciate the opportunity to provide our services on this project. Please contact us at 813-886-1075 if you have any questions.

Respectfully,

Professional Service Industries, Inc.


Martin E. Millburg, P.E.
Senior Engineer
Florida License No. 36584

